



Mini Cyclope

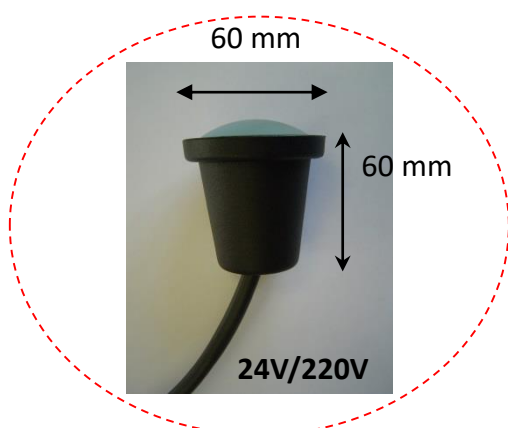
Waterproof recessed with a power led resinated in a compact cast aluminium body. Its clear or sandblasted diffusing porthole allows it to be used as a spotlight or beacon.

APPLICATION




- Exterior beaconing
- Façade enhancement
- Indoor or outdoor spotlight

Technical data	MCD80	MCD100	MCD120
Maximum load	400kg	400kg	2.5 tonnes
Collerette	Round ø80mm	Square 100*100	Round ø120mm
Dimensions	H60 x ø60mm		
Number of LEDs	1		
Power	< 2W		
Materials	Body in cast aluminium sightglass in clear, curved or sandblasted diffusing glass optional lens		
Color	Blue Red Green Warm White Cool White RGB		
Angle	10° 20° 35° 50° 120° according to model		
Lifespan	50,000 hours L 70		
operating temperature	-20°C to +60°C		
Volatage	24Vca/cc or 230Vca		
Electrical class	Classe III or classe II		
Connection	Cable HO7RNF 2x1mm ²		
IK	IK10		
IP	IP67		
Optional attachment	Deep back box (70mm)		
Compliance	RoHS		
Glow wire test	850°C		
Warranty	5 years		
Place of manufacture	France		




Photometric data +/- 10%, the manufacturer reserves the right to modify the characteristics without prior notice.



Trois versions de collerette inox

-  Ronde 120 mm : charge maxi 2,5t
-  Ronde 80 mm charge maxi 400kg
-  Carrée 100 mm charge maxi 400k-

Trois versions de verre

-  Sablé
-  Clair
-  Bombé et sablé

Eccelectro
LED innovation

04 78 56 62 62
info@eccelectro.com
www.eccelectro.com